

WOVEN VINYL

Size: 250 x 1000 x 3mm | 16pcs/box 4m2

Clean & Tough



- + The first & only in woven flooring with NOX EPT™ shield treatment (Anti-Bacterial)
- + Strong enough for heavy commercial use

Dimensional Stability & Consistent Thickness



- + The most reliable NOX EMT™ core structure
- + Consistent product thickness by patterns for mix & match with different patterns

Fray-Proof



- + Clean-cut finishing for preventing fraying even when cutting tiles during installation



Safe

Certified non-toxic, phthalate-free, and fiberglass-free fabric



Quick

Quick and Easy ECOLAY® installation without glue



Easy

Minimal cleaning time and low maintenance



Silent & Soft

Soft surface absorbing sound




Non-Slip

Slip-resistance with woven fabric surface



Colorfast

Colorfast properties retain gorgeous original colors over time

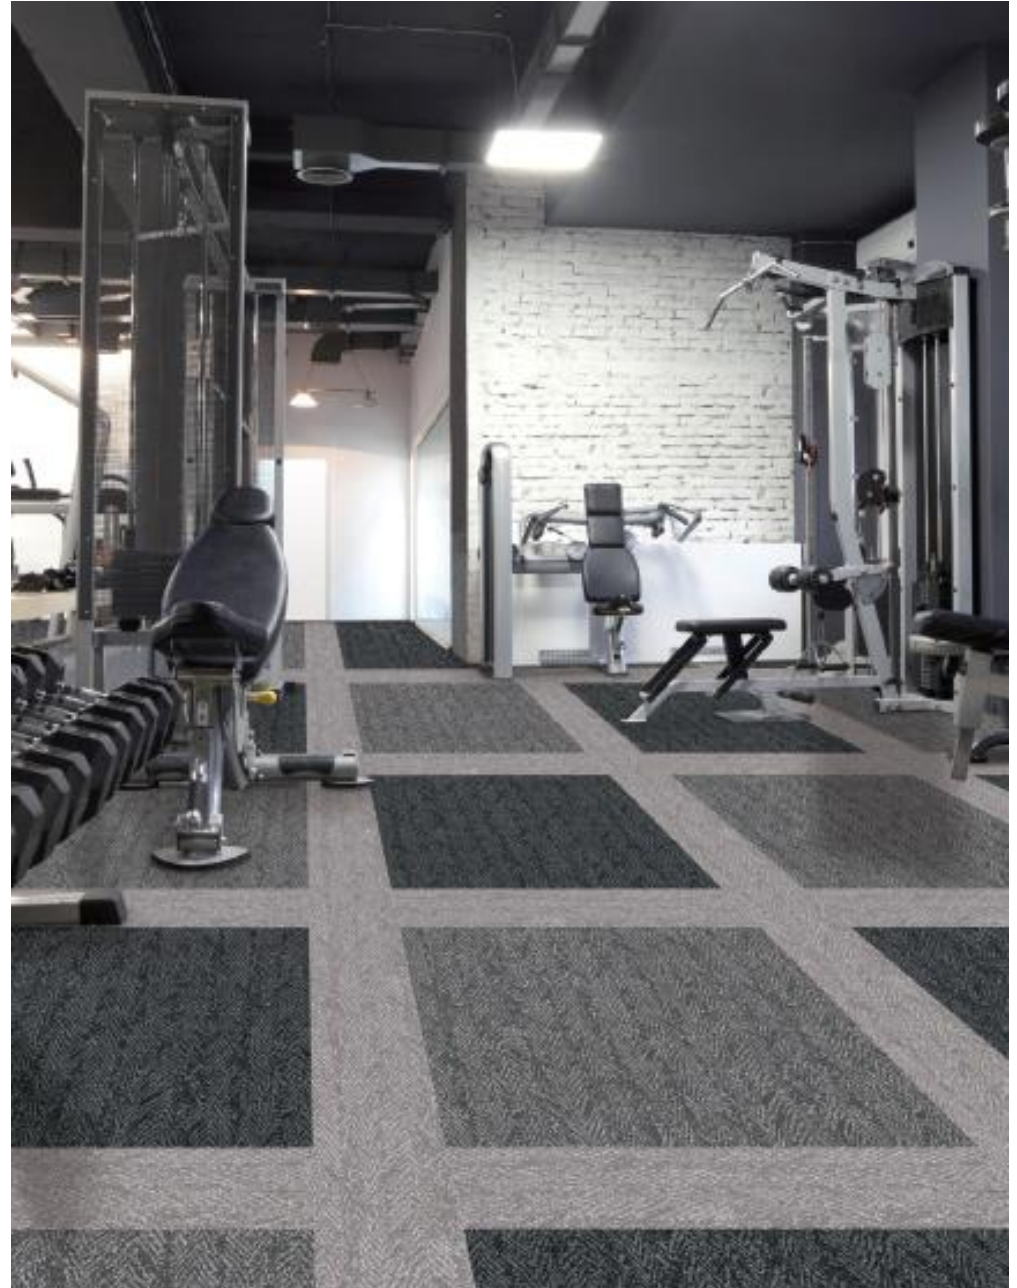



FQ-2403



FQ-2401



FQ-2402



FQ-2601



FQ-2603



FQ-2604



FQ-2605



FQ-2502












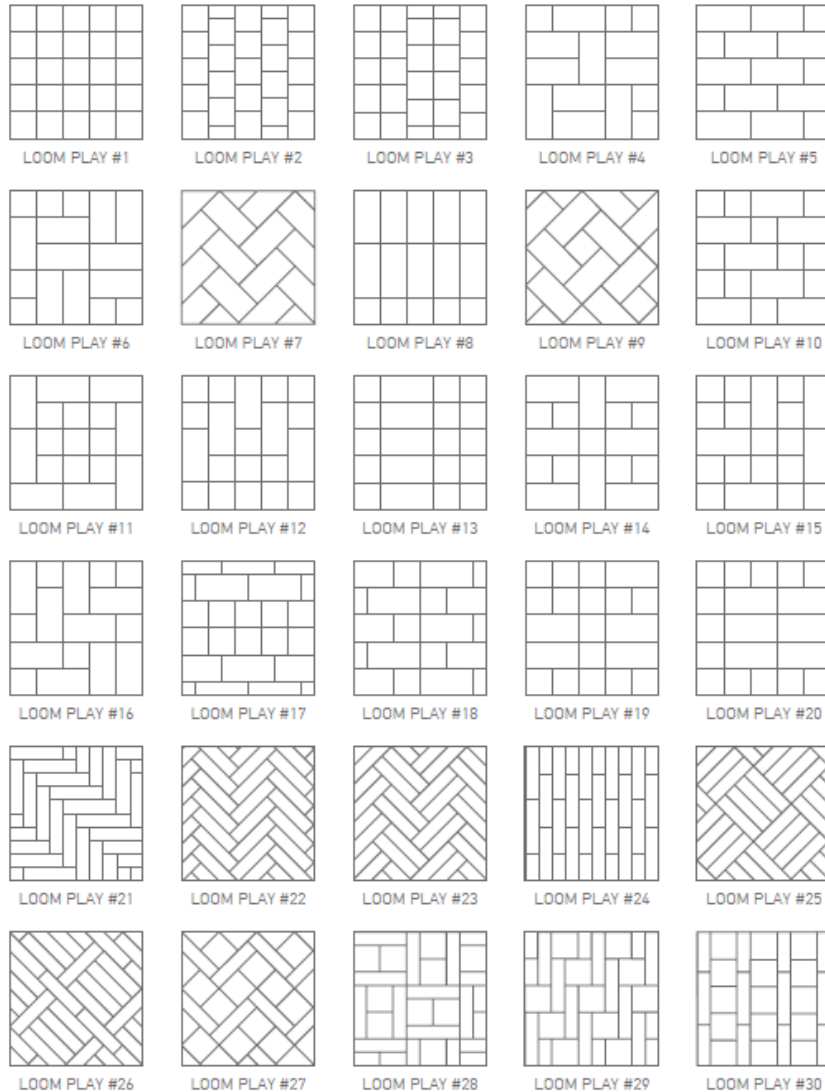


FQ-2505



FQ-2506

INSTALLATION CONCEPT GUIDE



Test Item	Standard	LOOM*
Level of use	 EN 685	33
Fraying	 EN 1814	Frayproof
Thermal resistance	 ISO 8302	0.02m ² /K/W
Castor chair resistance	 EN 985	No damage
Dimensional stability	 ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	 EN 13501-1	BR -s1
Indoor air quality		Low VOC (floor score certified)
Underfloor heating	EN 12524	Suitable
Light fastness	 ISO 105-B02	≥ 6
Slip resistance	 DIN 51130 EN 13893	R11 D5
Flexibility	ISO 24344	Passed
Impact sound insulation	 ISO 10140-3	9dB
Body Voltage	EN 1815	≤ 2KV
Squareness & Straightness	 ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation	 ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals	ISO 26987 ASTM F925	No Defects No Defects



*what a difference
a floor makes*



MOODS

MODERN FLOORING SOLUTIONS

www.moodsfloor.com